


Max-Prop Zinkanoden

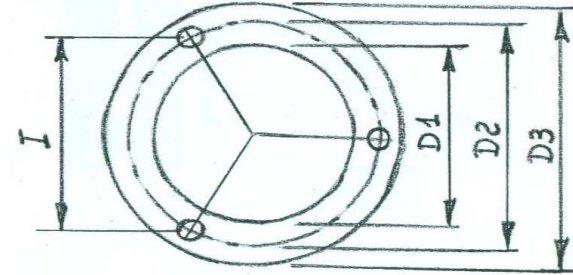

Prop-Kerndurchmesser/ Spinner in mm	D1	D2	D3	I	Schrauben
MK1 CLASSIC					
63	38	54		46,8	M5
70	ersetzt durch MK2 70				
83	46	70		60,6	M6
100	53	84		72,7	M6
125	80	100		86,6	M10
160	100	130		112,6	M10
MK2 CLASSIC					
63	38	50	60	43,3	M5
70	41	58	68	50,2	M5
83	ersetzt durch MK3 110 + 115				
100	ersetzt durch MK3 126 + 127				
MK3 EASY + WHISPER					
78	31	47	60	40,7	M5
85	31	50	64	43,3	M5
90	38	54	68	46,8	M5
99	43	58	68	50,2	M5
101	43	60	78	52	M5
111	49	65,8	83	57	M5
110 + 115	45	65	80	56,3	M5
120	52	71,5	90	61,9	M5
126 + 127	52	77,5	92	67,1	M6
129	56	80,5	104	69,7	M6
Spezialanode 2-Blatt Prop					
	ø unten				
63mm	35				